

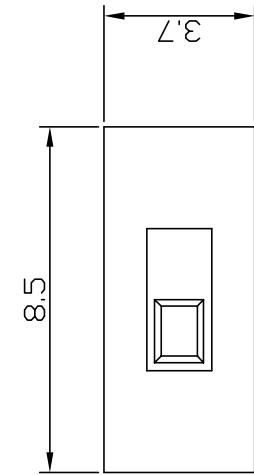
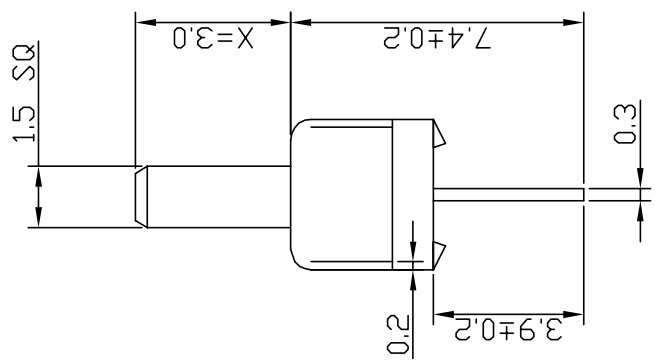
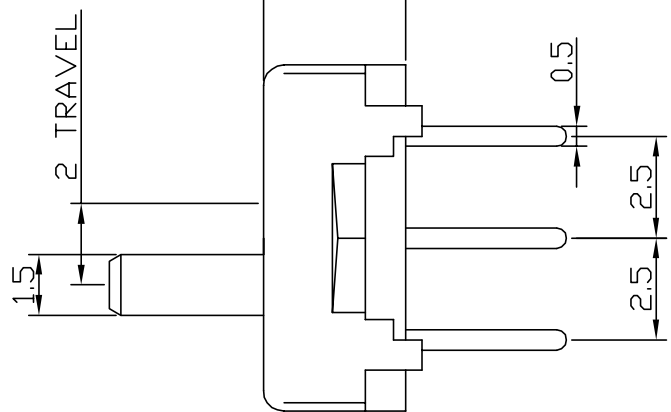


CAD FILE:

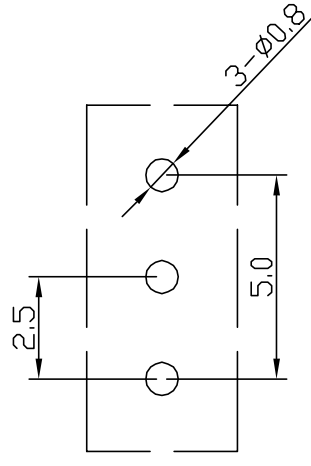

CIRCUIT DIAGRAM



PCB LAYOUT

KEY SPECIFICATION:

1. RATING: DC 30V 0.3A
2. FNCTION:1P2T
3. CONTACT RESISTANCE:100mΩhm MAX
4. INSULATION RESISTANCE:100MΩhm MIN
5. DIELECTRIC STRENGTH:AC 500V(50-60HZ)FOR 1Min
6. OPERATING FORCE:T1-T2:230gf±80gf
7. OPERATING LIFE:10,000CYCLES(15-18CYCLES/Min)
8. OPERATING TEMPERATURE:-20°C~+70°C

NO.	DESCRIPTION	MATERIAL	QTY	PLATING	SGS NO.																																																																						
8																																																																											
7																																																																											
6																																																																											
5	CONTACT	BRONZE	1	Ag PLATED	CANEC2004459646																																																																						
4	TERMINAL BASE	PHENOL IC RESIN	1	NATURE	CANEC2004459601																																																																						
3	TERMINAL	BRASS STRIP	3	Ag PLATED	CANEC2004459640																																																																						
2	FRAME	TRON STRIP	1	Ni PLATED	CANEC2004459650																																																																						
1	KNOB	POM	1	BLACK	CANEC2004459607																																																																						
<table border="1"> <thead> <tr> <th colspan="2">TOLERANCE UNLESS SPECIFIED</th> <th colspan="2">ISSUE</th> <th colspan="2">DATE</th> <th colspan="2">DESCRIPTIONS</th> <th colspan="2">APPD.</th> </tr> </thead> <tbody> <tr> <td>WITHIN 1.5:</td> <td>±0.1mm</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>OVER 1.5:</td> <td>±0.2mm</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="2">ANGLES: ±2°</td> <td colspan="2">TITLE:SLIDE SWITCH</td> <td colspan="2">UNIT:mm</td> <td colspan="2">DRWG. NO.:SS12D00GXX-A03</td> <td colspan="2"></td> </tr> <tr> <td colspan="2">MODEL NO: SS-12D00G3</td> <td colspan="2">SCALE:4:1</td> <td colspan="2">DWN</td> <td colspan="2">CDWG YIN</td> <td colspan="2">JUN15,2020</td> </tr> <tr> <td colspan="2">XIAMEN JINBEILI ELECTRONICS CO.,LTD</td> <td colspan="2"></td> <td colspan="2">CHK'D</td> <td colspan="2">SANJUN LIU</td> <td colspan="2">JUN15,2020</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">APPD.</td> <td colspan="2">Y.D.FENG</td> <td colspan="2">JUN17,2020</td> </tr> </tbody> </table>						TOLERANCE UNLESS SPECIFIED		ISSUE		DATE		DESCRIPTIONS		APPD.		WITHIN 1.5:	±0.1mm									OVER 1.5:	±0.2mm									ANGLES: ±2°		TITLE:SLIDE SWITCH		UNIT:mm		DRWG. NO.:SS12D00GXX-A03				MODEL NO: SS-12D00G3		SCALE:4:1		DWN		CDWG YIN		JUN15,2020		XIAMEN JINBEILI ELECTRONICS CO.,LTD				CHK'D		SANJUN LIU		JUN15,2020						APPD.		Y.D.FENG		JUN17,2020	
TOLERANCE UNLESS SPECIFIED		ISSUE		DATE		DESCRIPTIONS		APPD.																																																																			
WITHIN 1.5:	±0.1mm																																																																										
OVER 1.5:	±0.2mm																																																																										
ANGLES: ±2°		TITLE:SLIDE SWITCH		UNIT:mm		DRWG. NO.:SS12D00GXX-A03																																																																					
MODEL NO: SS-12D00G3		SCALE:4:1		DWN		CDWG YIN		JUN15,2020																																																																			
XIAMEN JINBEILI ELECTRONICS CO.,LTD				CHK'D		SANJUN LIU		JUN15,2020																																																																			
				APPD.		Y.D.FENG		JUN17,2020																																																																			